


Streamer technology air purifier

MC80Z

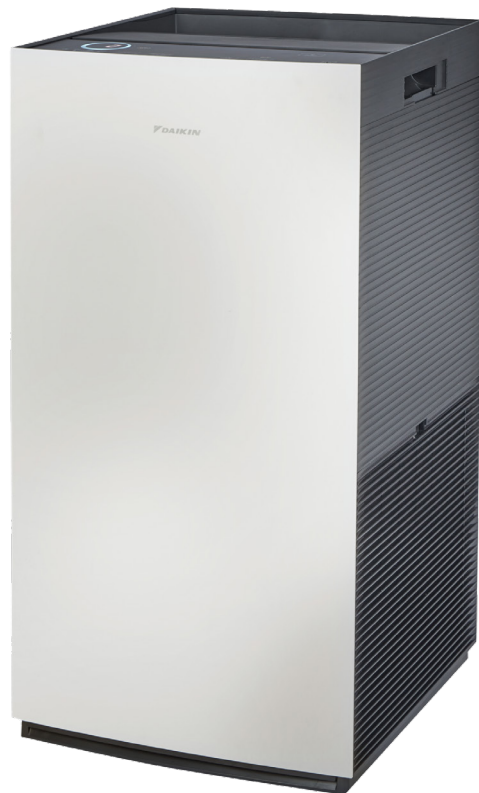

Flash Streamer

DAIKIN



Onecta via app

Powerful air purification

- › Onecta app
- › Air purification for large spaces up to 124 m²
- › Daikin's Catch and Clean approach
- › Intuitive display design

- › High performance electrostatic HEPA filter
- › Filter lifetime of ten years
- › Whisper quiet

MC80Z



Indoor Unit			MC80Z	80Z
Application				Floor standing type
Applicable room area			m ²	62 (1) / 124 (2)
CADR			m ³ /h	480 (3)
Weight	Unit		kg	9.8
Dimensions	Unit	Height x Width x Depth	mm	630 x 315 x 315
Casing	Colour			Front: White, Top/Side: Dark Grey
Fan	Type			Multi Blade Fan (Sirocco fan)
	Air flow rate	Air purifying operation	Silent/Low/Medium/Turbo	m ³ /h
				84 /132 /210 /480
Sound pressure level (4)	Air purifying operation	Silent/Low/Medium/Turbo	dBA	19 /25 /34 /55
Air purifying operation	Power input	Silent/L/M/Turbo	kW	0.009 /0.011 /0.016 /0.080
Deodorizing method				Twin streamer + Deodorizing catalyst
Dust collecting method				Electrostatic HEPA filter (5) (7)
Air filter	Type			Polyethylene terephthalate net
Sign	Item	01		PM2.5 sensor lamp: 3 stages / Odour sensor lamp: 3 stages / AIR MONITOR indicator: 0µg/m ³ - 99µg/m ³ (8) / 0 °C - 39 °C, 20% - 90% / FAN lamps: Quiet/Low/Standard/Turbo / Econo mode / Anti-pollen mode / CIRCULATION mode / Child proof lock lamp / AIR MONITOR setting lamps / Streamer lamp / Daikin eye / AUTO FAN mode / Humidity monitor lamp: 5 stages / WIFI lamp
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/60/220-240/220-230
Type				Air Purifier
Power supply	Plug	Type		C

(1) The coverage area is appropriate for operating the unit of maximum fan speed(HH). Coverage area indicates the space where a certain amount of dust particles can be removed in 30 minutes. |

(2) Converted to NRCC standards from test values in accordance with JEM1467. |

(3) Converted to CADR standards from test values in accordance with JEM1467. |

(4) Operating sound levels are the average of values measured at 1m away from the front, left, right and top of the unit. (These are equal to the values in an anechoic chamber) |


(5) Electrostatic HEPA filter is attached in the unit. |

(6) Other function: Active plasma ion function. Auto-restart function. |

(7) Requirements according to JEM1467. |

(8) "HI" is displayed when the PM2.5 concentration exceeds 99µg/m³.

Daikin Europe N.V. Naamloze Vennootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)



ECPEN23-616

08/2023

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

